




SOLAR TRACKER SOLUTION




DAMPER FOR SOLAR TRACKER SYSTEM

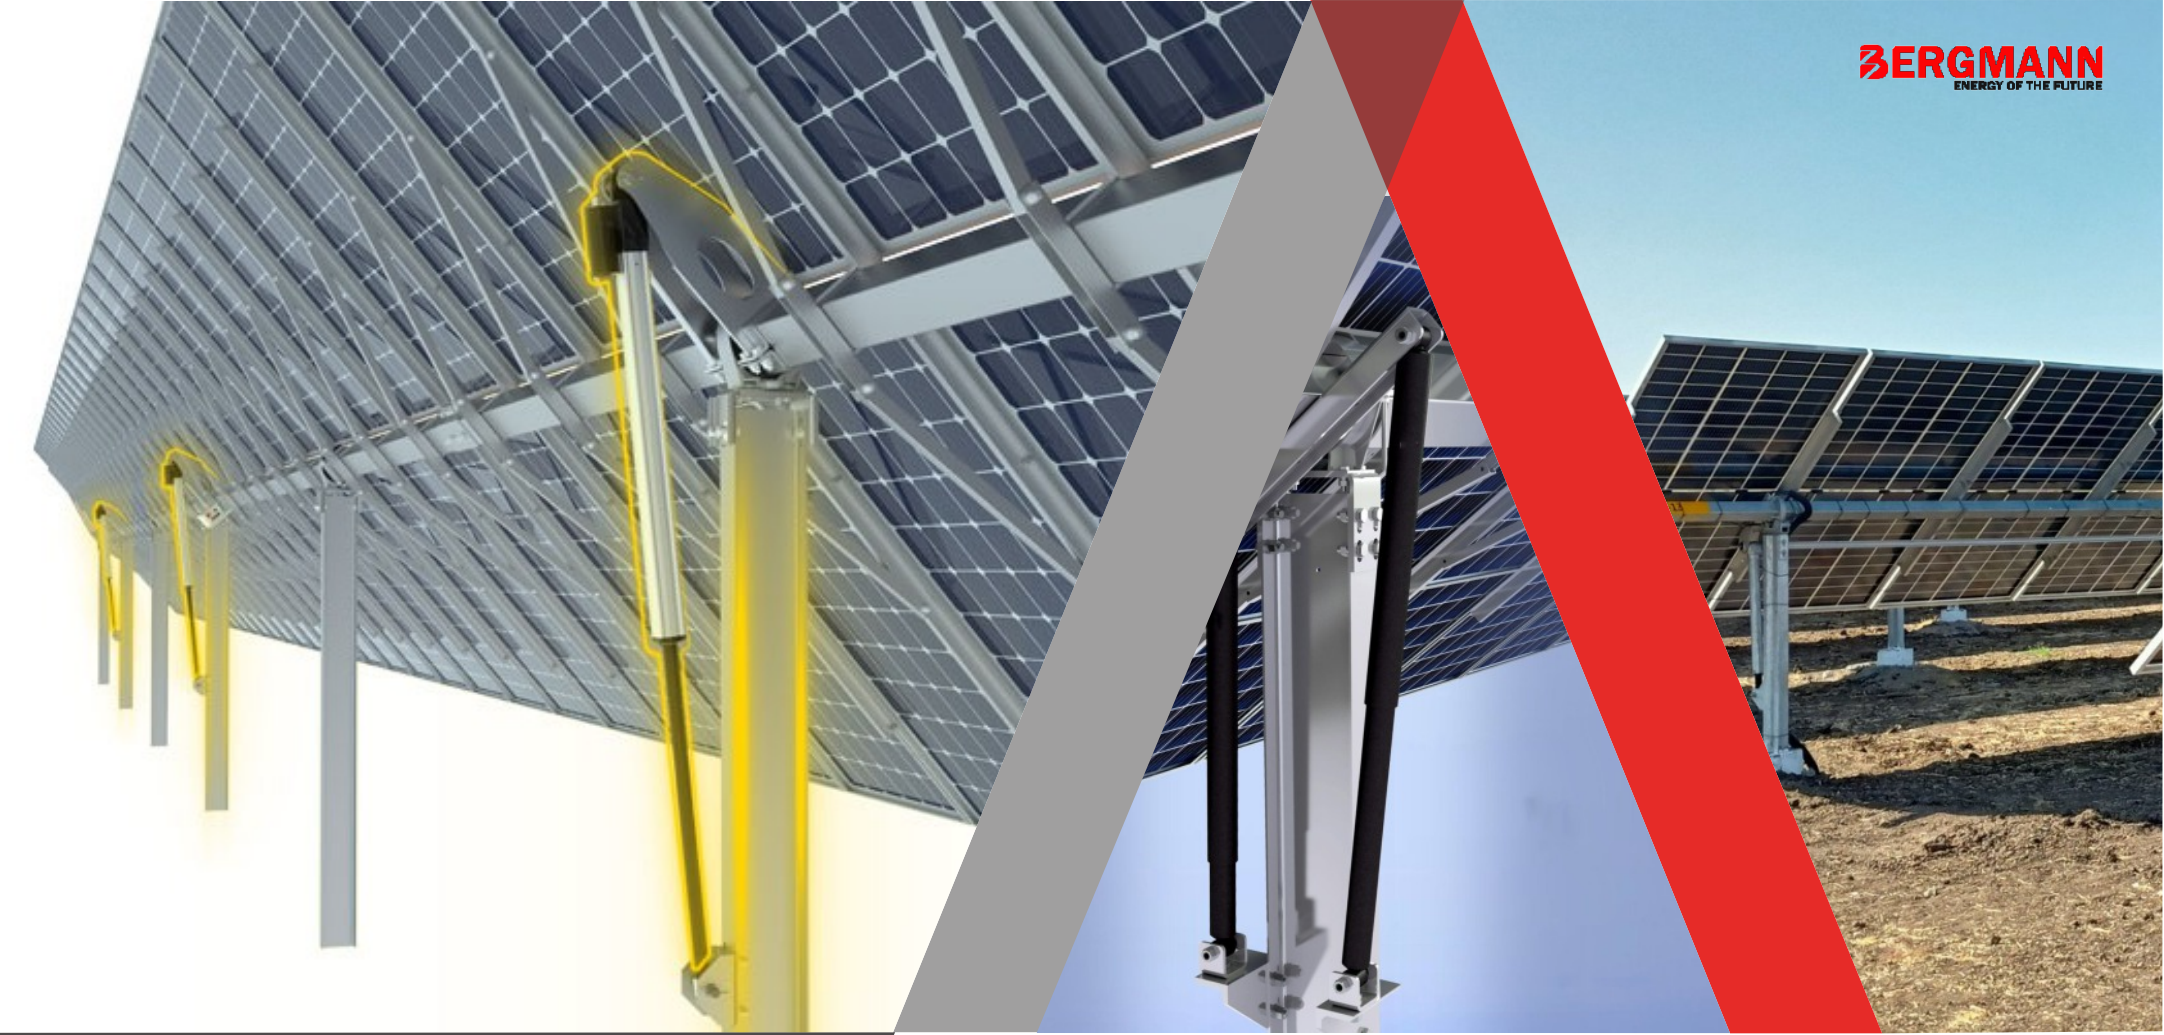



SOLAR TRACKER SOLUTION





Model:	RSD-400-30-CC	RSD-400-30-CC/S	
Dust Cover Diameter:	70 mm	57 mm	
Oil Cylinder Diameter:	57 mm	45 mm	
Extended Length (MAX):	970 mm		
Compressed Length (MIN):	570 mm		
Application:	1P Tracker		
Connecting Ends:	Stainless Steel Rubber Bushing		
Connecting Ends Diameter:	Φ16 mm		

Model:	RSD-400-30-CC	RSD-450-30-QQ/S	
Dust Cover Diameter:	60 mm	57 mm	
Oil Cylinder Diameter:	51 mm	45 mm	
Extended Length (MAX):	1100 mm		
Compressed Length (MIN):	650 mm		
Application:	1P Tracker		
Connecting Ends:	Ball Joints		
Connecting Ends Diameter:	M16x2		

Model:	RSD-600-30-CC	RSD-600-30-CC/S	
Dust Cover Diameter:	60 mm	57 mm	
Oil Cylinder Diameter:	51 mm	45 mm	
Extended Length (MAX):	1350 mm		
Compressed Length (MIN):	750 mm		
Application:	1P or 2P Tracker		
Connecting Ends:	Stainless Steel Rubber Bushing		
Connecting Ends Diameter:	Φ16 mm		

Model:	RSD-510-25-ZZ/W	
Dust Cover Diameter:	N/A	
Oil Cylinder Diameter:	38 mm	
Extended Length (MAX):	1295±3 mm	
Compressed Length (MIN):	785±3 mm	
Application:	1P Tracker	
Connecting Ends:	Spherical Rod Ends	
Connecting Ends Diameter:	Φ14 mm	

Model:	RSD-535-25-ZZ	
Dust Cover Diameter:	48 mm	
Oil Cylinder Diameter:	38 mm	
Extended Length (MAX):	1247 mm	
Compressed Length (MIN):	712 mm	
Application:	1P Tracker	
Connecting Ends:	Spherical Rod Ends	
Connecting Ends Diameter:	Φ10 mm	

Model:	RSD-549-25-ZZ	
Dust Cover Diameter:	48 mm	
Oil Cylinder Diameter:	38 mm	
Extended Length (MAX):	1275 mm	
Compressed Length (MIN):	726 mm	
Application:	1P Tracker	
Connecting Ends:	Spherical Rod Ends	
Connecting Ends Diameter:	Φ10 mm	

* Paint Color, Stroke length, Connecting Ends Diameter and Damping Constant can be customized as per customer needs.
* Paint used is corrosion-resistant & UV resistant.